


ABSOLUTE™ D-PYRO

High temperature HEPA filter

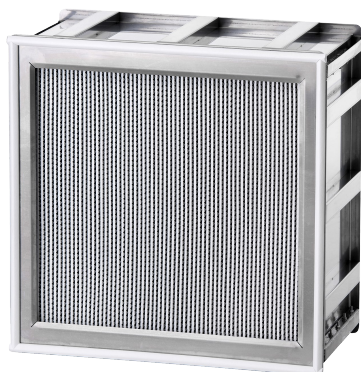

ADVANTAGES

- Zero tempering
- Zero Emission
- Zero Outgasing
- ProSafe + REACH compliance
- H13 in all Temp. ranges $\geq 99,95\%$ and H14 in all Temp. ranges $\geq 99,995\%$ at MPPS with DEHS
- Temperature resistant up to 350°C
- Patented construction

Application	HEPA filter protection for clean processes at high temperature, especially for Life Science (depyrogenation tunnels, ovens)
Type	High temperature HEPA filter
Frame	Stainless steel
Media	Glass fiber
Separator	Stainless steel
Sealant	Inorganic polymer
Max. final pressure drop	700Pa
Comment	Temperature: 350°C with peaks up to 400°C Remarks: ISO 5 under all production steps. Please note installation and assembly instructions! Other editions on request (with gasket, or sizes)

Model Name	Type	EN1822	Dimensions WxHxD (mm)	Air Flow/pressure drop ($\text{m}^3/\text{h}/\text{Pa}$)	Media area (m^2)	Weight (kg)
DHT13-457x457x150-0-SP	Absolute™ D-Pyro H13	H13	457x457x150	510/250	5,3	9,0
DHT13-762x610x292-0-SP	Absolute™ D-Pyro H13	H13	762x610x292	2250/250	25,9	44,0
DHT13-305x610x150-0-SP	Absolute™ D-Pyro H13	H13	305x610x150	460/250	4,8	8,0
DHT13-762x610x150-0-SP	Absolute™ D-Pyro H13	H13	762x610x150	1260/250	13,1	34,0
DHT13-457x610x150-0-SP	Absolute™ D-Pyro H13	H13	457x610x150	750/250	7,3	12,0
DHT13-610x610x150-0-SP	Absolute™ D-Pyro H13	H13	610x610x150	990/250	10,4	16,0
DHT13-610x610x292-0-SP	Absolute™ D-Pyro H13	H13	610x610x292	1850/250	20,7	26,0
DHT13-457x610x292-0-SP	Absolute™ D-Pyro H13	H13	457x610x292	1310/250	14,6	19,5
DHT13-305x610x292-0-SP	Absolute™ D-Pyro H13	H13	305x610x292	780/250	9,7	13,0
DHT14-305x610x150-0-SP	Absolute™ D-Pyro H14	H14	305x610x150	420/190	4,8	8,0
DHT14-610x610x150-0-SP	Absolute™ D-Pyro H14	H14	610x610x150	840/190	10,4	16,0
DHT14-457x457x150-0-SP	Absolute™ D-Pyro H14	H14	457x457x150	450/190	5,3	9,0
DHT14-762x610x150-0-SP	Absolute™ D-Pyro H14	H14	762x610x150	1040/190	13,1	34,0
DHT14-457x610x150-0-SP	Absolute™ D-Pyro H14	H14	457x610x150	610/190	7,3	12,0
DHT14-305x610x292-0-SP	Absolute™ D-Pyro H14	H14	305x610x292	670/190	9,7	13,0
DHT14-457x610x292-0-SP	Absolute™ D-Pyro H14	H14	457x610x292	1000/190	14,6	19,5
DHT14-762x610x292-0-SP	Absolute™ D-Pyro H14	H14	762x610x292	1675/190	25,9	44,0
DHT14-610x610x292-0-SP	Absolute™ D-Pyro H14	H14	610x610x292	1340/190	20,7	26,0

Pressure drop: $\pm 10\%$

www.camfil.com

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice.

2020-03-17